


32

VERTICAL RIM LOCKS

RIM LOCKS



safeguarding your security

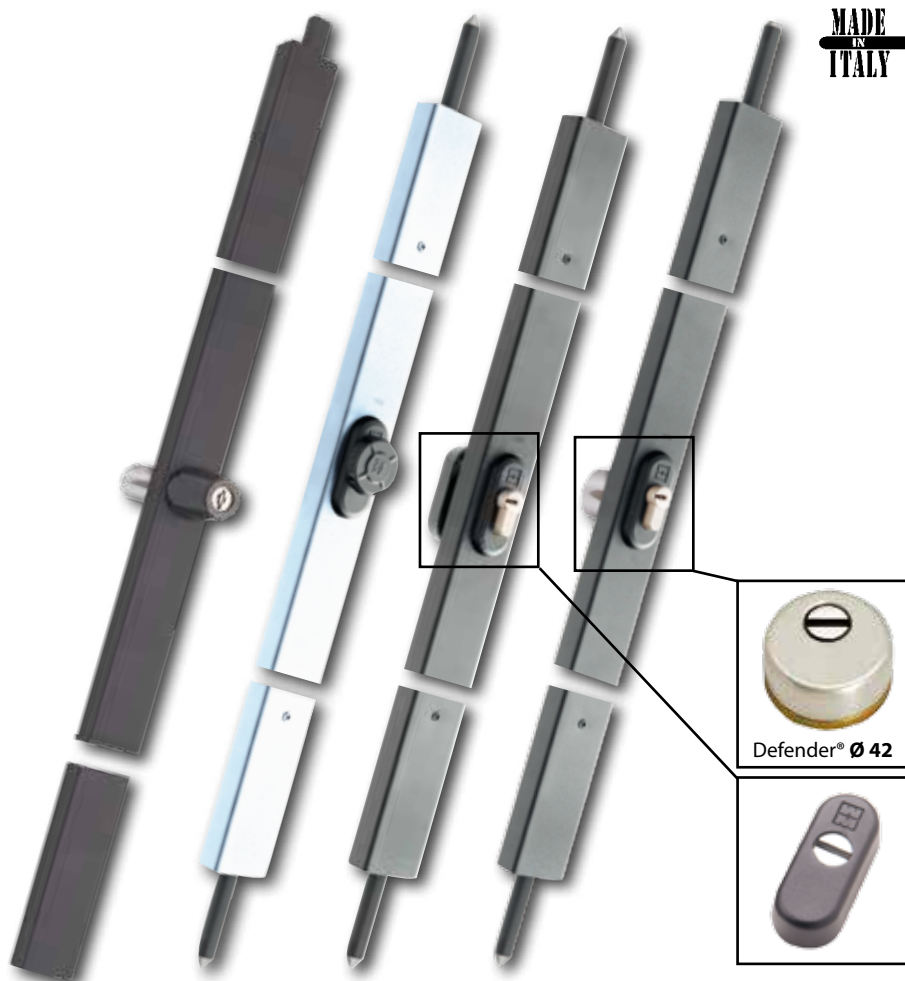MADE
IN
ITALY

Characteristics

Series 32 is completed by a choice of rim locks compatible with the TOP versions range CHAMPIONS® C28PLUS, or with the use of new cylinders brand PROJECT by MOTTURA.

The cylinders of these locks may be masterized with other cylinders of the same type.

Different locking systems are possible with the 32 Series. In the case of an external cylinder, the lock may be protected with the "Defender" (see accessories).

These locks are available in 4 heights, from 1700 mm for windows to 2500 mm for French windows, and if necessary, the height may be extended to 3000 mm using the optional extension.

Defender® Ø 42

SUITABLE FOR CYLINDER

| Article | Finish | Length [mm] | |
|------------------|----------------------------|--------------|--|
| 32.690/17 | Black enamelled | 1.700 | |
| | White enamelled on request | | |
| 32.590/21 | Black enamelled | 2.100 | |
| | White enamelled on request | | |
| 32.590/23 | Black enamelled | 2.300 | |
| | White enamelled on request | | |
| 32.590/25 | Black enamelled | 2.500 | |
| | White enamelled on request | | |

VERTICAL RIM LOCKS FOR EUROPROFILE CYLINDER

Rim locks operated with cylinder

- Backset: 24 mm
- Adjustable Bar travel: from 20 to 85 mm
- Ferrule: Ø14 mm
- Height of cylinder from floor: 1000 mm
- Height of cylinder from floor (version /17) 500 mm
- Possible to shave 150 mm upward, 50 mm downward for Art.32.590/21 and /23 - 600 mm, 50 mm for Art. 32.590/25
- Possible to shave 300 mm upward, 50 mm downward for Art.32.690/17
- Width: 48 mm

Supplied with:

- 1 escutcheon, Art. 95420
- 1 clasp, Art. 99289
- 1 floor striker plate, Art. 99168
- screws and small parts

In this series it can be combined with the defender art. 94.11818 or 94920.




LOCKING SYSTEMS

Lock features are the same as for items 32590/xx and 32690/xx, but the locks are supplied with all accessories (cylinder, Defender, escutcheon) according to the system chosen. Project cylinders or Champions® cylinders are available. **Possibility to implement KA systems.**

INTERNAL + EXTERNAL CYLINDER




| Article | Length [mm] | Cylinder lenght | | |
|-----------------|--------------|-----------------|--|--|
| 32592N21 | 2.100 | 31/61 | | |
| | | 31/71 | | |
| | | 31/81 | | |
| 32592N23 | 2.300 | 31/61 | | |
| | | 31/71 | | |
| | | 31/81 | | |
| 32592N25 | 2.500 | 31/61 | | |
| | | 31/71 | | |
| | | 31/81 | | |



INTERNAL CYLINDER




| Article | Length [mm] | Cylinder lenght | | |
|-----------------|--------------|-----------------|--|--|
| 32698N17 | 1.700 | 41/31 | | |
| 32596N21 | 2.100 | 41/31 | | |
| 32596N23 | 2.300 | 41/31 | | |
| 32596N25 | 2.500 | 41/31 | | |





INTERNAL KNOB

| Article | Length [mm] | | |
|-----------------|--------------|--|--|
| 32699N17 | 1.700 | | |
| 32597N21 | 2.100 | | |
| 32597N23 | 2.300 | | |
| 32597N25 | 2.500 | | |





LOCKING SYSTEMS



INTERNAL + EXTERNAL CYLINDER WITH DEFENDER
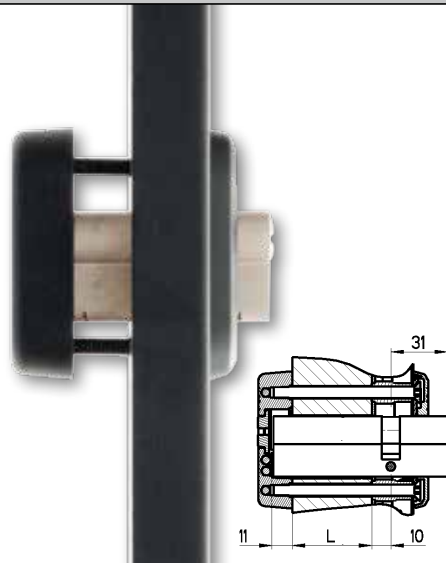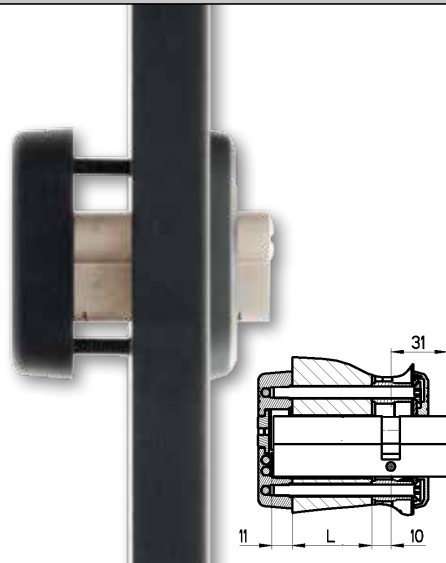
| | | | 3 keys PROJECT | 3 keys C28PLUS |  |
|-----------------|--------------|-----------------|-------------------|-------------------|---|
| Article | Length [mm] | Cylinder lenght | | | |
| 32593N21 | 2.100 | 31/61 | | | |
| | | 31/71 | | | |
| | | 31/81 | | | |
| 32593N23 | 2.300 | 31/61 | | |  |
| | | 31/71 | | | |
| | | 31/81 | | | |
| 32593N25 | 2.500 | 31/61 | | | |
| | | 31/71 | | | |
| | | 31/81 | | | |

INTERNAL KNOB + EXTERNAL CYLINDER WITH DEFENDER
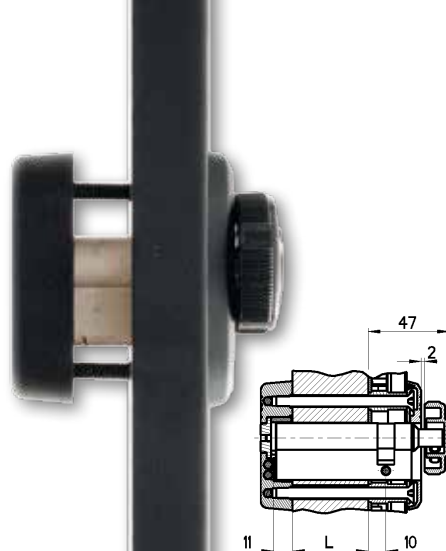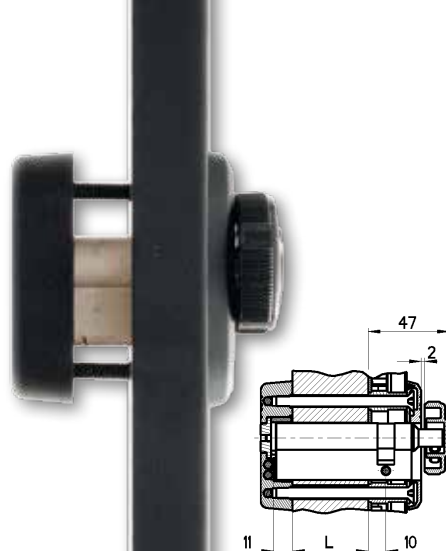
| | | | 3 keys PROJECT | 3 keys C28PLUS |  |
|-----------------|--------------|-----------------|-------------------|-------------------|--|
| Article | Length [mm] | Cylinder lenght | | | |
| 32594N21 | 2.100 | 15/61 | | | |
| | | 15/71 | | | |
| | | 15/81 | | | |
| 32594N23 | 2.300 | 15/61 | | |  |
| | | 15/71 | | | |
| | | 15/81 | | | |
| 32594N25 | 2.500 | 15/61 | | | |
| | | 15/71 | | | |
| | | 15/81 | | | |

INTERNAL KNOB + EXTERNAL CYLINDER
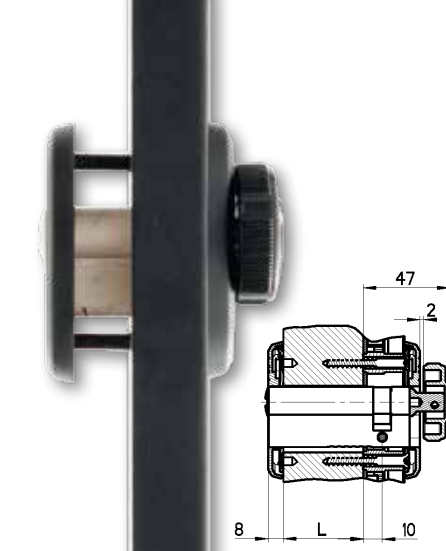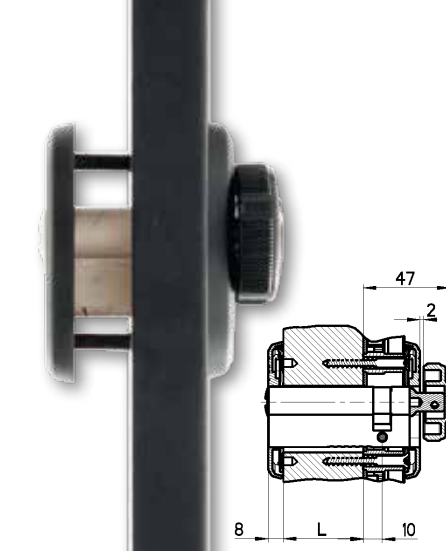
| | | | 3 keys PROJECT | 3 keys C28PLUS |  |
|-----------------|--------------|-----------------|-------------------|-------------------|---|
| Article | Length [mm] | Cylinder lenght | | | |
| 32595N21 | 2.100 | 15/61 | | | |
| | | 15/71 | | | |
| | | 15/81 | | | |
| 32595N23 | 2.300 | 15/61 | | |  |
| | | 15/71 | | | |
| | | 15/81 | | | |
| 32595N25 | 2.500 | 15/61 | | | |
| | | 15/71 | | | |
| | | 15/81 | | | |

WITH DOUBLE PUMP-CYLINDER

| Article | Finish | Length [mm] | |
|------------------|-----------------|--------------|--|
| 32.992/21 | Black enamelled | 2.100 | |
| 32.992/23 | Black enamelled | 2.300 | |
| 32.992/25 | Black enamelled | 2.500 | |

OPENS FROM INSIDE WITH CODED KEY

- Backset: 24 mm
- Bar travel: 28 mm
- Ferrule: 20 x 14 mm
- External pump-cylinder length: 50 mm (for different lengths see series 91)
- Height of pump-cylinder from floor: 1000 mm
- Possible to shave 150 mm upward, 50 mm downward for Art. 32.992/21 and /23
- 600 mm, 50 mm for Art. 32.992/25
- Width: 48 mm

Supplied with:

- 3 keys, Art. 92105
- 1 escutcheon, Art. 95148/N
- 1 clasp, Art. 99289
- 1 floor striker plate, Art. 99151
- screws and small parts



WITH EXTERNAL PUMP AND INTERNAL KNOB

| Article | Finish | Length [mm] | |
|------------------|-----------------|--------------|--|
| 32.995/21 | Black enamelled | 2.100 | |
| 32.995/23 | Black enamelled | 2.300 | |
| 32.995/25 | Black enamelled | 2.500 | |

OPENS FROM INSIDE WITH KNOB

- Backset: 24 mm
- Bar travel: 28 mm
- Ferrule: 20 x 14 mm
- External pump-cylinder length: 50 mm (for different lengths see series 91)
- Height of pump-cylinder from floor: 1000 mm
- Possible to shave 150 mm upward, 50 mm downward for Art. 32.995/21 and /23
- 600 mm, 50 mm for Art. 32.995/25
- Width: 48 mm

Supplied with:

- 3 keys, Art. 92105
- 1 escutcheon, Art. 95148/N
- 1 clasp, Art. 99289
- 1 floor striker plate, Art. 99151
- screws and small parts



WITH INTERNAL PUMP-CYLINDER

| Article | Finish | Length [mm] | |
|------------------|-----------------|--------------|--|
| 32.998/17 | Black enamelled | 1.700 | |
| 32.996/21 | Black enamelled | 2.100 | |
| 32.996/23 | Black enamelled | 2.300 | |
| 32.996/25 | Black enamelled | 2.500 | |


OPENS FROM INSIDE WITH CODED KEY

- Opens from inside with key
- Backset: 24 mm
- Bar travel: 28 mm
- Ferrule: 20 x 14 mm
- Height of pump-cylinder from floor:
500 mm for Art. 32.998/17
- Height of pump-cylinder from floor:
1000 mm for Art. 32.996/21/23/25
- Internal pump protrudes 51 mm
- Possible to shave 300 mm upward, 50 mm downward for Art. 32.998/17
- Possible to shave 150 mm upward, 50 mm downward for Art. 32.996/21 and /23
600 mm, 50 mm for Art. 32.996/25
- Width: 48 mm - 23 mm thick

Supplied with:

- 3 keys, Art. 92105
- 1 clasp, Art. 99289
- 1 floor striker plate, Art. 99151
- screws and small parts

3 keys
art. 92105



INTERNAL KNOB ONLY


| Article | Finish | Length [mm] | |
|------------------|-----------------|--------------|--|
| 32.999/17 | Black enamelled | 1.700 | |
| 32.997/21 | Black enamelled | 2.100 | |
| 32.997/23 | Black enamelled | 2.300 | |
| 32.997/25 | Black enamelled | 2.500 | |








OPENS FROM INSIDE WITH KNOB







- Backset: 24 mm
- Bar travel: 28 mm
- Ferrule: 20 x 14 mm
- Height of knob from floor:
500 mm for Art. 32.999/17
- Height of knob from floor:
1000 mm for Art. 32.997/21/23/25
- Internal knob protrudes 20 mm
- Possible to shave 300 mm upward, 50 mm downward for Art. 32.999/17
- Possible to shave 150 mm upward, 50 mm downward for Art. 32.997/21 and /23
600 mm, 50 mm for Art. 32.997/25
- Width: 48 mm - 23 mm thick

Supplied with:

- 1 clasp, Art. 99289
- 1 floor striker plate, Art. 99151
- screws and small parts



| | | | |
|---|--------|----------|---|
| 32.991N | | |  |
| Finish | | | |
| Black enamelled | | | |
| Extension for vertical rim lock series 32.992 - Length 300 mm For use over 200 mm replace the bar supplied with the lock with art. 93.290N | | | |
| 32.991N500 | | |  |
| Finish | | | |
| Black enamelled | | | |
| White enamelled on request | | | |
| Extension for vertical rim lock series 32.590 - Length 500 mm For use over 200 mm replace the bar supplied with the lock with art. 93.296N | | |  |
| 93.290N | | | |
| Finish | | | |
| Black | | | |
| Bar 10x20 mm with straight ferrule Ø 20x14 mm for extension art. 32.991/N Length 108 cm | | |  |
| 93.296N | | | |
| Finish | | | |
| Black | | | |
| Bar 10x20 mm with straight ferrule Ø mm14 for extension art. /N 32.991N500 Length 148,7 cm | | |  |
| 94.11101.. | | | |
| Code | Finish | Th. [mm] | |
| 94.11101 | Black | 2,5 | |
| 94.11101/1 | Black | 1 | |
| Spacer for Defender® 94.920 Package of 25 | | |  |
| 94.11200 | | | |
| Finish | | | |
| Zinc-plated | | | |
| Spacer thickness mm. 2.5 for Defender® Ø 42 mm - art. 94.11818 fixing hole centre distance 25 mm. Package of 25 | | |  |

| | | |
|--|--|---|
| 94.11818 | |  |
| Finish | | |
| PVD Gold | | |
| Satin chrome | | |
| Reinforcement Defender® Ø 42 for 32.590/690 Height 40 mm. Fixing hole centre distance 25 mm. Including 2 special M4x20 screws. Protection on the backset mm 6. Chrome washer with backset slot 3.5 or 5 mm (specify in order). | | |
| 94.920 | |  |
| Finish | | |
| Black | | |
| Zamak reinforcement Defender® mm 32 x 75 x 18.5 for series 32-37-47 backset protection: 6 mm Backset slot of 3.5 or 5 mm (specify in order) | | |
| 94.922 | |  |
| Finish | | |
| Black | | |
| Steel reinforcement Defender® (53 HRC) mm 32 x 75 x 18.5 for series 32-37-47 backset protection: 6 mm Backset slot of 3.5 or 5 mm (specify in order) | | |
| 95.316/42 | |  |
| Finish | | |
| PVD Gold | | |
| Satin chrome | | |
| Flat escutcheon mm 52 x 70 hole Ø 42 mm. Package of 10 | | |
| 95.420 | |  |
| Finish | | |
| Black | | |
| External escutcheon mm 32 x 75 x 8.5 including metal support for series 32, 37, 47 Package of 10 | | |
| 95.428 | |  |
| Finish | | |
| Black | | |
| Internal escutcheon mm 32 x 75 x 8.5 including special metal support for series , 32, Package of 10 | | |

95.428/P

Finish

Black

Internal escutcheon **mm 32 x 75 x 8.5**
including special metal support
for cylinders with knob
series **32**
Package of 10



99.168

Finish

Brass

Floor striker plate
for bars Ø 14 mm
travel 65 mm
Package of 10



99.289


Finish

Bronze enamelled

Black enamelled

White enamelled

Bar clasp
for art. 30.426/32.992/32.997
Specify the finish and the article to be installed on.
Package of 10



99.293/L

Length [mm]

| | |
|-----------|------------|
| 40 | 80 |
| 50 | 90 |
| 60 | 100 |
| 70 | |

M6 screws for cylinder reinforcement
(price per screw)
Package of 50



99.295

Finish

Black

Plastic cylinder knob
with Ø 8/10 mm shaft
for series 32 and 38
Package of 10



C28L...

Article

A - B

Finish

CP8L610001

76 - 61

Nickel-plated

CP8L710001

86 - 71

Nickel-plated

CP8L810001

96 - 81

Nickel-plated

Special half cylinder
for art. 32.594N21/23/25 and art. 32.595N21/23/25.
Supplied with: n°3/5 keys + card




DPC1C21

Finish

Nickel-plated

Special half cylinder
for art. 32.597N21/23/25 and art. 32.699N17.



DPC1L...

Article

A - B

Finish

DPC1L61

76 - 61

Nickel-plated

DPC1L71

86 - 71

Nickel-plated

DPC1L81

96 - 81

Nickel-plated

Special half cylinder
for art. 32.594N21/23/25 and art. 32.595N21/23/25.
Supplied with: n°3 keys + card

